
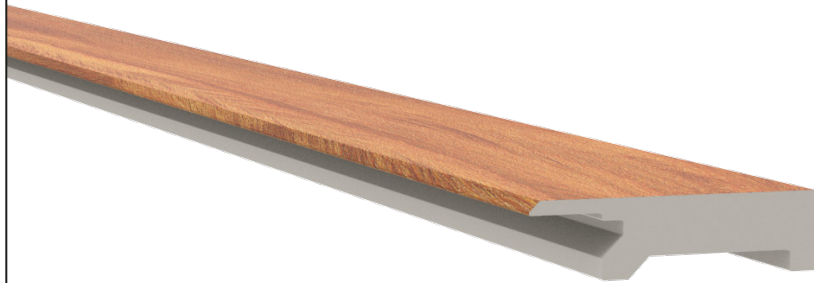


# Cellular PVC Siding J-Trim

# TECHNICAL DATA SHEET

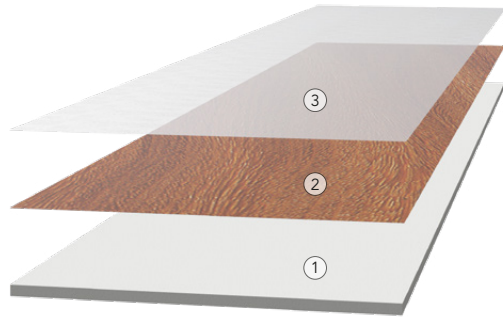

### 1. CELLULAR PVC

Strong and sturdy cellular PVC accessories perfectly matching texture and color of planks.

Versatile profile can be used around windows, doors and entire periphery of wall.


Installation can be made both vertically and horizontally.

### 2. HD PRINTING

High-definition digital inkjet print  $\pm 1$  mil (25.4  $\mu\text{m}$ ) thick of a wide range of textures with outstanding color variations.

### 3. Z-CLEAR


A protective clear coat  $\pm 1.2$  mils (30.48  $\mu\text{m}$ ) thick is applied to provide long-term protection against fading.

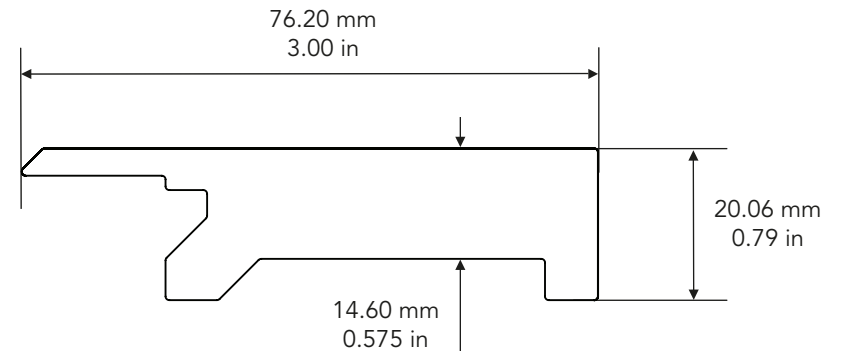

## Tests & Certifications\*




- . ASTM D256 - Impact Resistance
- . ASTM D638 - Tensile Properties Testing
- . ASTM D790 - Flexural Properties Testing
- . ASTM D6578 - Graffiti Resistance
- . ASTM G155 - 2000h UV Resistance
- . ASTM D3359 - Adhesion Testing

\* see website for full details

Name :	Job # :	Color :	Date :
	Model : PS-JTS-0701	Product : Cellular PVC J-Trim	Initials :
	Length : 2.20 m / 7.2 ft	Material : Cellular PVC	
	Drawing by: JCC Date: 11/11/20	Weight per piece: 1.2 kg / 2.65 lbs	
			Sheet size: 8.5" x 11"

# Cellular PVC Siding Aluminum Starter Strip

## TECHNICAL DATA SHEET

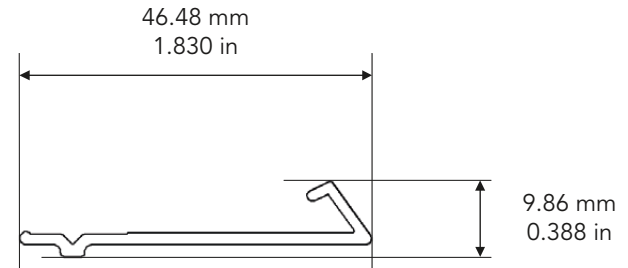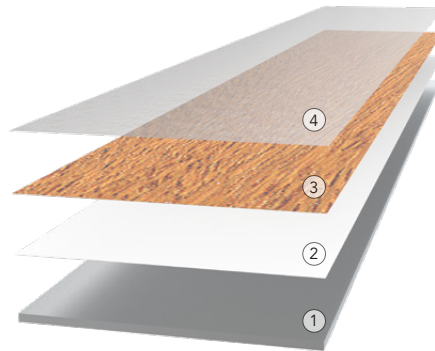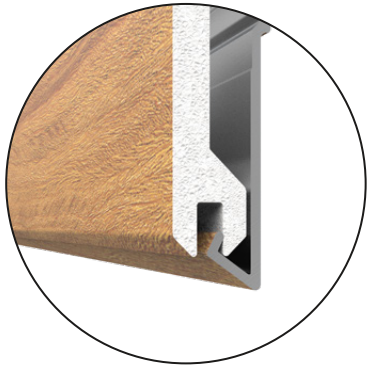

### 1. ALUMINUM

6063-T5 Aluminum extrusion 1.50 mm (0.060 in) thick, recognized as the industry's first choice for its exceptional durability.

Two oblong holes 1" x 0.125", (25.4 mm x 3.175 mm), spaced 2" (50 mm) apart, all being repeated every 4" (101 mm) to allow for fast and easy screw insertion.

Works with every profile and plank width.

Installation can be made both vertically and horizontally.

### 2. PRIMER COAT

Specially formulated primer coat  $\pm 1.2$  mils (30.48  $\mu\text{m}$ ) thick assures optimal adhesion between aluminum and ink.

### 3. HD PRINTING

High-definition digital inkjet print  $\pm 1$  mil (25.4  $\mu\text{m}$ ) thick of a wide range of textures with outstanding color variations.

### 4. Z-CLEAR

A protective clear coat  $\pm 1.2$  mils (30.48  $\mu\text{m}$ ) thick is applied to provide long-term protection against fading.

## Tests & Certifications\*


- . CAN/ULC S102 - Fire Resistance
- . CAN/ULC S114 - Fire Resistance
- . ASTM E84 - Fire Resistance
- . NFPA 285 - Fire Resistance
- . ASTM D6578 - Graffiti Resistance
- . ASTM G155 - UV Resistance
- . ISO 7895 / ASTM E330 - Wind Load
- . ISO 7895 - Impact Resistance
- . ASTM D3359 - Adhesion testing
- . Florida Building Code (FBC) compliance
- . LEED V4

\* see website for full details

Name :	Job # :	Color :	Date :
	Model : FA-SSV-1201	Product : Aluminum Starter Strip	Initials :
	Length : 3.65 m / 12 ft	Material : Aluminum 6063-T5	
	Drawing by: JCC Date: 11/11/20	Weight per piece : 1.16 kg / 2.56 lbs	
			Sheet size: 8.5" x 11"

# Cellular PVC Siding Outside Corner

# TECHNICAL DATA SHEET

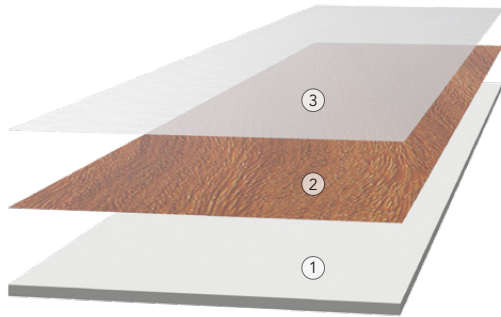

### 1. CELLULAR PVC

Strong and sturdy cellular PVC accessories perfectly matching texture and color of planks.

Versatile profile can be used around entire periphery of wall.



Installation can be made both vertically and horizontally.

### 2. HD PRINTING

High-definition digital inkjet print  $\pm 1$  mil ( $25.4 \mu\text{m}$ ) thick of a wide range of textures with outstanding color variations.

### 3. Z-CLEAR


A protective clear coat  $\pm 1.2$  mils ( $30.48 \mu\text{m}$ ) thick is applied to provide long-term protection against fading.

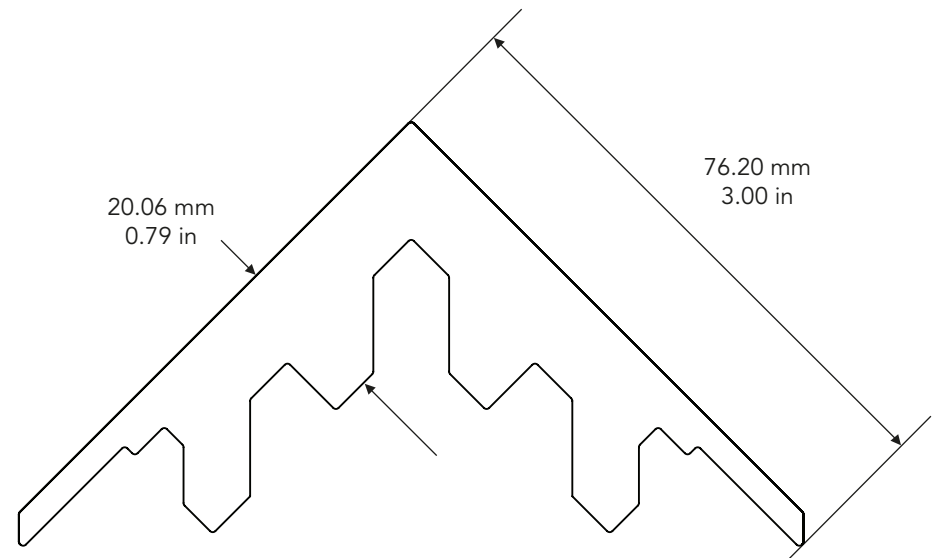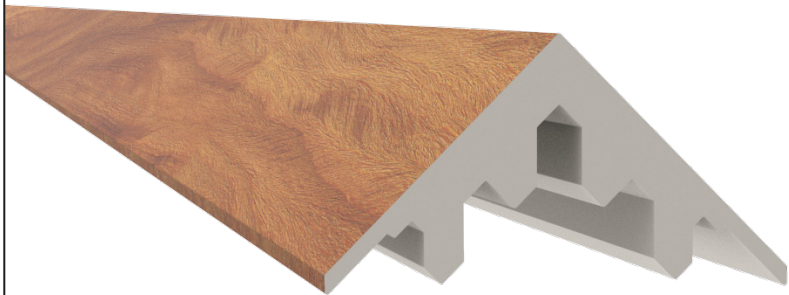

## Tests & Certifications\*

- . ASTM D256 - Impact Resistance
- . ASTM D638 - Tensile Properties Testing
- . ASTM D790 - Flexural Properties Testing
- . ASTM D6578 - Graffiti Resistance
- . ASTM G155 - 2000h UV Resistance
- . ASTM D3359 - Adhesion Testing

\* see website for full details

Name :	Job # :	Color :	Date :
	Model : PS-OSC-0701	Product : Cellular PVC Outside Corner	Initials :
	Length : 2.20 m / 7.2 ft	Material : Cellular PVC	
	Drawing by: JCC Date: 11/11/20	Weight per piece: 1.8 kg / 3.97 lbs	
			Sheet size: 8.5" x 11"