

November 26, 2020


DIZAL Inc.
4000, Jean-Marchand
Québec, QC G2C
1Y6 CANADA

TEST REPORT # MI-20-12184-2

On August 27th 2020, Micom Laboratories Inc. received 1 sample to perform Salt Spray Testing.

SAMPLE DESCRIPTION:

- Sample 2 : 1 x specimen, 3" x 6", Dizal_S-Cell_Salt-Spray-1

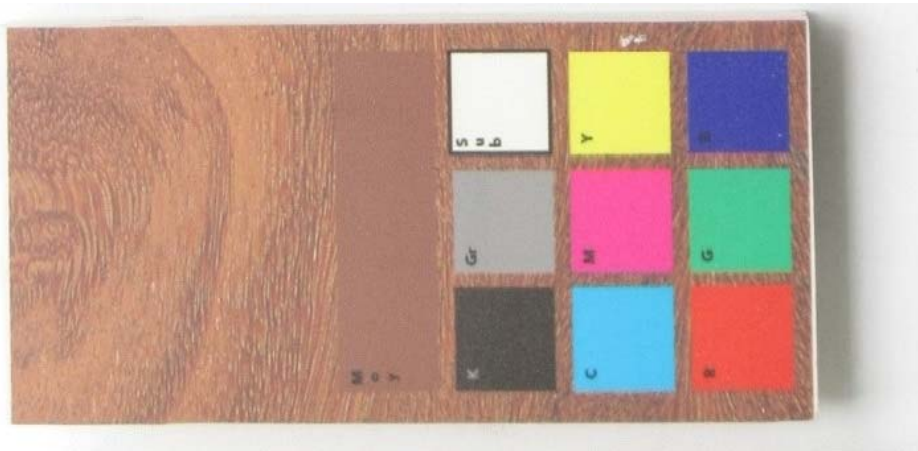

Sample 2

This report shall not be reproduced except in full, without the written approval of the laboratory. The results herein relate only to the items tested.

REFERENCE TEST METHOD:

Sample was exposed as per ASTM B117 - Standard Practice for Operating Salt Spray (Fog) Apparatus.

Conditions in the Salt Spray chamber:

- pH range : 6.5 – 7.2
- Salt concentration : $5 \pm 1\%$
- Temperature : $35 \pm 2^\circ\text{C}$
- Collector : 1.0 – 2.0 mL/hour

Exposure duration: 2000hrs.

- Interruptions in exposure: No Yes length of time: - - - - Cause: - - - -
- Sample was exposed: As received Protection used: - - - -
- Sample cleaned: Demineralized water Other: - - - -
- Sample: Supported (between 15 and 30° from the vertical)
- Suspended




Salt Fog/Spray machine used

This report shall not be reproduced except in full, without the written approval of the laboratory. The results herein relate only to the items tested.

RESULTS:

Tests performed between 2020-08-27 and 2020-11-19.

- **2000hrs**

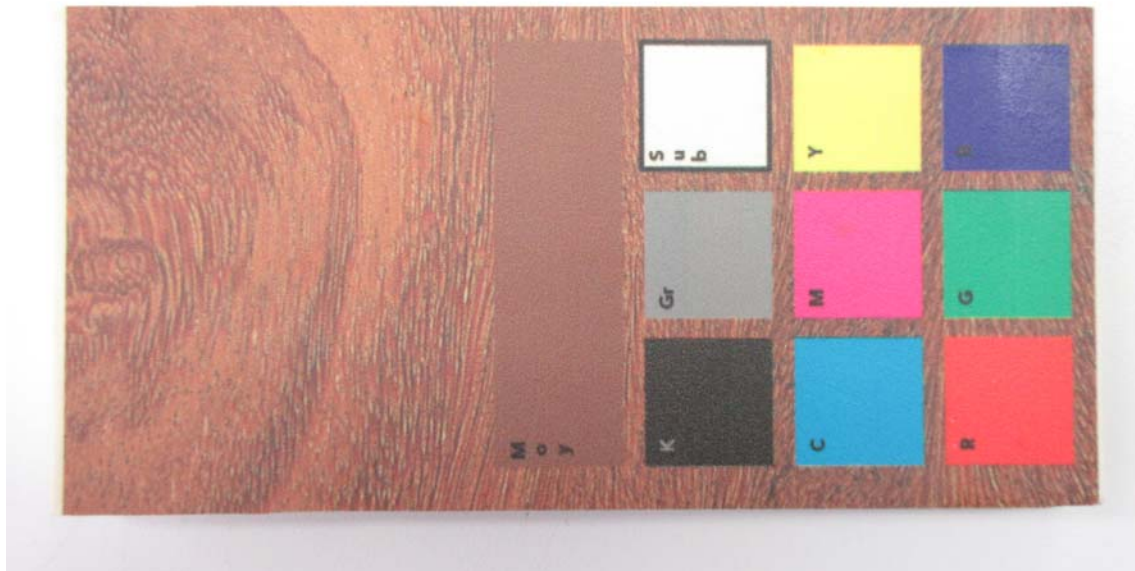

Sample 2 after 2000hrs exposure

CONCLUSION:

No sign of corrosion was visible after the 2000 hours of exposition on the samples.

Prepared by:

Adrien Mulot
Project Manager

Approved by:

Jacques St-Denis
Laboratories Supervisor

This report shall not be reproduced except in full, without the written approval of the laboratory. The results herein relate only to the items tested.