


TECHNICAL DATA SHEET ALUMINUM SIDING ACCESSORIES

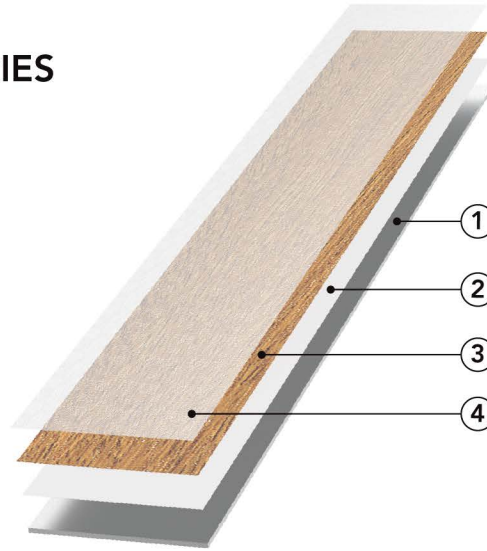

J-TRIM (1in)

1. ALUMINUM

6063-T5 Aluminum extrusion 0.055" (1.40mm) thick, recognized as the industry's first choice for its exceptional durability.

The two-piece accessory moldings are joined together using a snap system, allowing installation without exposed screws.

Installation can be done horizontally and vertically.

2. PRIMER COAT



Specially formulated primer coat ± 1.2 mils (30.48 μ m) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING


High-definition digital inkjet print ± 1 mil (25.4 μ m) thick of a wide range of textures with outstanding color variations.

4. Z-CLEAR


A protective clear coat ± 1.2 mils (30.48 μ m) thick is applied to provide long-term protection against fading.

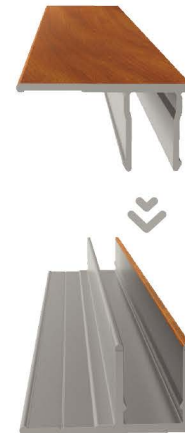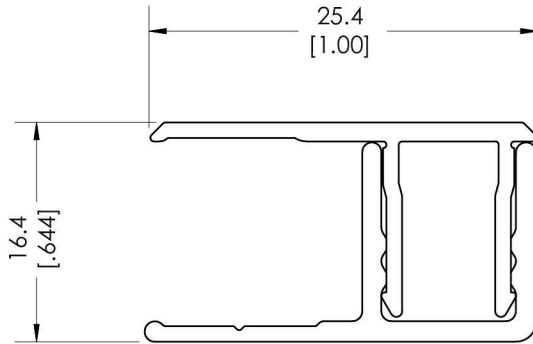

CAP




BASE



Not to scale. Dimensions : mm [in]



| | | | |
|-------------------------------------------------------------------------------------------------------------------------------------------|---------|---------------------------------------------------|------------------------------------------------|
| Name : | | Date : | Initials : |
| Project : | Color : | Product : J-trim (1in), siding accessories | |
|  DIZAL DIGITAL PRINTING 1-888-88DIZAL DIZAL.COM | | Model : FA-JTS-1201 | Material : 6063-T5 aluminum |
| | | Length : 12ft 3.56m | Weight (Cap only) : 1.93 kg 4.25 lbs |
| | | Drawing by : JCC Date : 11/11/20 | Total weight (Cap & Base) : 2.83 kg 6.25 lbs |
| | | Rev. date : 20/12/22 | Format : 8.5" x 11" 216 x 279 mm |


TESTS and CERTIFICATIONS (visit dizal.com for full details)

| | |
|----------------------------------|--------------------------------------------|
| . CAN/ULC S102 - Fire Resistance | . ASTM D6578 - Graffiti Resistance |
| . CAN/ULC S114 - Fire Resistance | . ASTM G155 - UV Resistance |
| . ASTM E84 - Fire Resistance | . ISO 7895 / ASTM E330 - Wind load |
| . NFPA 285 - Fire Resistance | . ASTM D4060 (CS-17) - Abrasion Resistance |
| . ISO 7895 - Impact Resistance | . Florida Building Code (FBC) compliance |
| . ASTM D3359 - Adhesion Testing | . LEED V4 |

Dizal reserves the right to modify the elements on this technical data sheet without prior notice.

TECHNICAL DATA SHEET

ALUMINUM SIDING ACCESSORIES

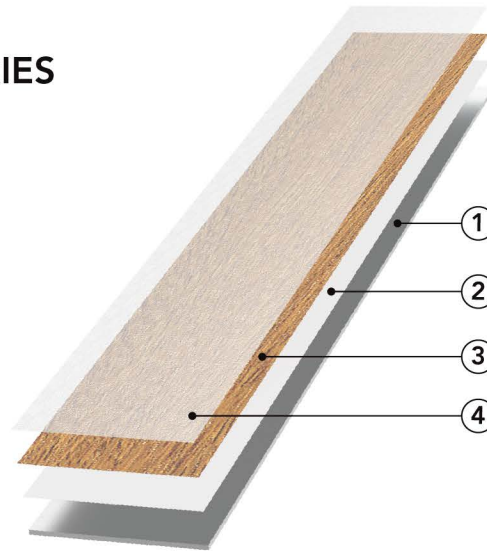

J-TRIM (1.75in)

1. ALUMINUM

6063-T5 Aluminum extrusion 0.055" (1.40mm) thick, recognized as the industry's first choice for its exceptional durability.

The two-piece accessory moldings are joined together using a snap system, allowing installation without exposed screws.

Installation can be done horizontally and vertically.

2. PRIMER COAT




Specially formulated primer coat ± 1.2 mils (30.48 μ m) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING

High-definition digital inkjet print ± 1 mil (25.4 μ m) thick of a wide range of textures with outstanding color variations.


4. Z-CLEAR

A protective clear coat ± 1.2 mils (30.48 μ m) thick is applied to provide long-term protection against fading.

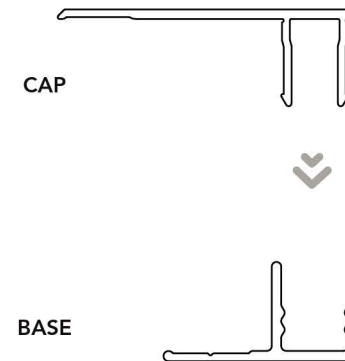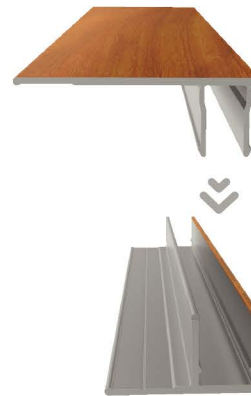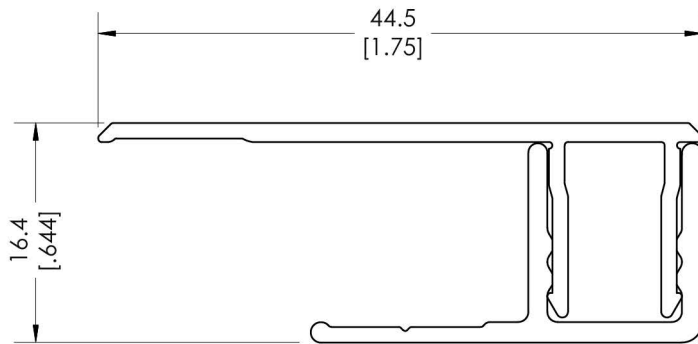

Not to scale. Dimensions : mm [in]




| | | |
|-------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|------------------------------------------------------|
| Name : | Date : | Initials : |
| Project : | Color : | Product : J-trim (1.75in), siding accessories |
|  DIGITAL PRINTING 1-888-88DIZAL DIZAL.COM | Model : FA-JTL-1201 | Material : 6063-T5 aluminum |
| | Length : 12ft 3.56m | Weight (Cap only) : 2.23 kg 4.92 lbs |
| | Drawing by : JCC Date : 11/11/20 Rev. date : 20/12/22 | Total weight (Cap & Base) : 3.14 kg 6.92 lbs |
| | | Format : 8.5" x 11" 216 x 279 mm |

TESTS and CERTIFICATIONS (visit dizal.com for full details)

| | |
|----------------------------------|--------------------------------------------|
| . CAN/ULC S102 - Fire Resistance | . ASTM D6578 - Graffiti Resistance |
| . CAN/ULC S114 - Fire Resistance | . ASTM G155 - UV Resistance |
| . ASTM E84 - Fire Resistance | . ISO 7895 / ASTM E330 - Wind load |
| . NFPA 285 - Fire Resistance | . ASTM D4060 (CS-17) - Abrasion Resistance |
| . ISO 7895 - Impact Resistance | . Florida Building Code (FBC) compliance |
| . ASTM D3359 - Adhesion Testing | . LEED V4 |

Dizal reserves the right to modify the elements on this technical data sheet without prior notice.

TECHNICAL DATA SHEET ALUMINUM SIDING ACCESSORIES

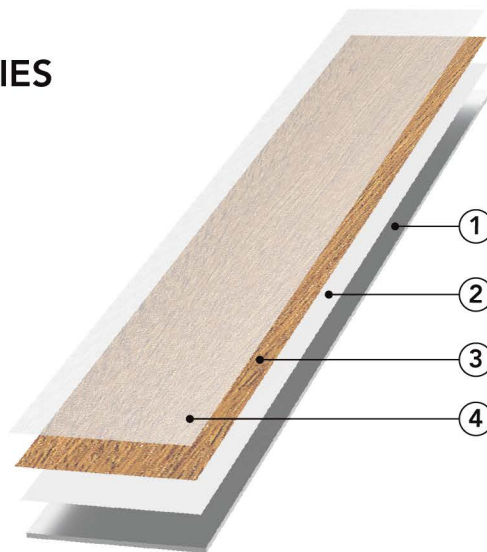

H-TRIM

1. ALUMINUM

6063-T5 Aluminum extrusion 0.055" (1.40mm) thick, recognized as the industry's first choice for its exceptional durability.

The two-piece accessory moldings are joined together using a snap system, allowing installation without exposed screws.

Installation can be done horizontally and vertically.

2. PRIMER COAT


Specially formulated primer coat $\pm 1.2\text{mils}$ (30.48 μm) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING


High-definition digital inkjet print $\pm 1\text{mil}$ (25.4 μm) thick of a wide range of textures with outstanding color variations.

4. Z-CLEAR


A protective clear coat $\pm 1.2\text{mils}$ (30.48 μm) thick is applied to provide long-term protection against fading.

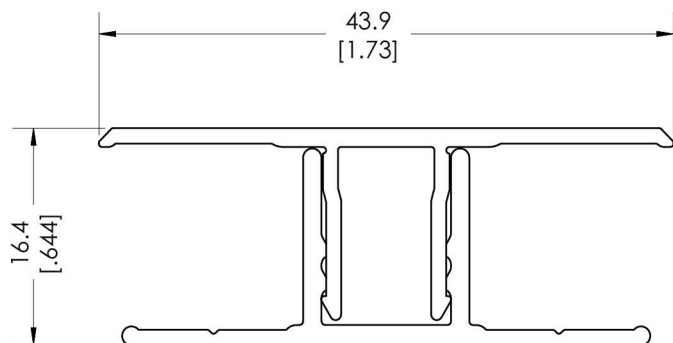

CAP




BASE



Not to scale. Dimensions : mm [in]





| | | |
|--------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------------|
| Name : | Date : | Initials : |
| Project : | Color : | Product : H-Trim, siding accessories |
|  DIGITAL PRINTING 1-888-88DIZAL DIZAL.COM | Model : FA-HTS-1201 | Material : 6063-T5 aluminum |
| | Length : 12ft 3.56m | Weight (Cap only) : 2.25kg 4.96lbs |
| | Drawing by : JCC Date : 11/11/20 | Total weight (Cap & Base) : 3.16kg 6.96lbs |
| | Rev. date : 20/12/22 | Format : 8.5" x 11" 216 x 279 mm |

TESTS and CERTIFICATIONS (visit dizal.com for full details)

| | |
|----------------------------------|--------------------------------------------|
| . CAN/ULC S102 - Fire Resistance | . ASTM D6578 - Graffiti Resistance |
| . CAN/ULC S114 - Fire Resistance | . ASTM G155 - UV Resistance |
| . ASTM E84 - Fire Resistance | . ISO 7895 / ASTM E330 - Wind load |
| . NFPA 285 - Fire Resistance | . ASTM D4060 (CS-17) - Abrasion Resistance |
| . ISO 7895 - Impact Resistance | . Florida Building Code (FBC) compliance |
| . ASTM D3359 - Adhesion Testing | . LEED V4 |

Dizal reserves the right to modify the elements on this technical data sheet without prior notice.

TECHNICAL DATA SHEET ALUMINUM SIDING ACCESSORIES

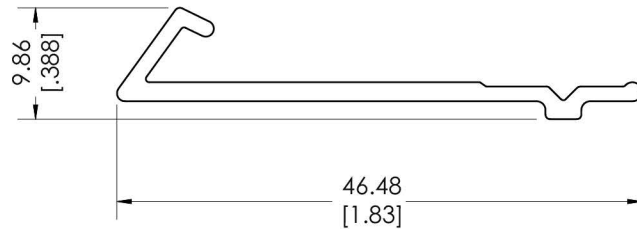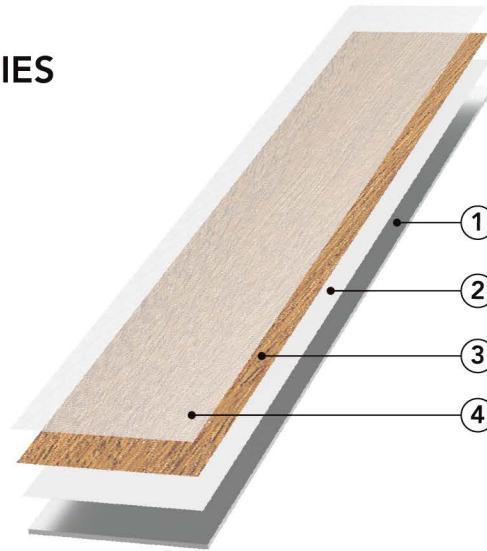

STARTER TRIM/STRIP

1. ALUMINUM

6063-T5 Aluminum extrusion 0.055" (1.40mm) thick, recognized as the industry's first choice for its exceptional durability.

Oblong holes 1.5" x 0.187", (38.1 mm x 4.75 mm), all being repeated every 8" (203mm) to allow a fast and easy screw insertion.

Installation can be done horizontally and vertically.

2. PRIMER COAT

Specially formulated primer coat ± 1.2 mils (30.48 μ m) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING


High-definition digital inkjet print ± 1 mil (25.4 μ m) thick of a wide range of textures with outstanding color variations.

4. Z-CLEAR

A protective clear coat ± 1.2 mils (30.48 μ m) thick is applied to provide long-term protection against fading.




Not to scale. Dimensions : mm [in]

| | | | |
|-------------------------------------------------------------------------------------------------------------------------------------|---------|---------------------------------------------------|------------------------------------|
| Name : | | Date : | Initials : |
| Project : | Color : | Product : Starter strip siding accessories | |
|  DIGITAL PRINTING 1-888-88DIZAL DIZAL.COM | | Model : FA-SSV-1201 | Material : 6063-T5 aluminum |
| | | Length : 12ft 3.56m | Weight : 1.16 kg 2.56 lb |
| | | Drawing by : JCC | |
| | | Date : 11/11/20 | |
| Dizal reserves the right to modify the elements on this technical data sheet without prior notice. | | Rev. date : 20/12/22 | Format : 8.5" x 11" 216 x 279 mm |

TESTS and CERTIFICATIONS (visit dizal.com for full details)


| | |
|----------------------------------|--------------------------------------------|
| . CAN/ULC S102 - Fire Resistance | . ASTM D6578 - Graffiti Resistance |
| . CAN/ULC S114 - Fire Resistance | . ASTM G155 - UV Resistance |
| . ASTM E84 - Fire Resistance | . ISO 7895 / ASTM E330 - Wind load |
| . NFPA 285 - Fire Resistance | . ASTM D4060 (CS-17) - Abrasion Resistance |
| . ISO 7895 - Impact Resistance | . Florida Building Code (FBC) compliance |
| . ASTM D3359 - Adhesion Testing | . LEED V4 |

TECHNICAL DATA SHEET
ALUMINUM SIDING ACCESSORIES

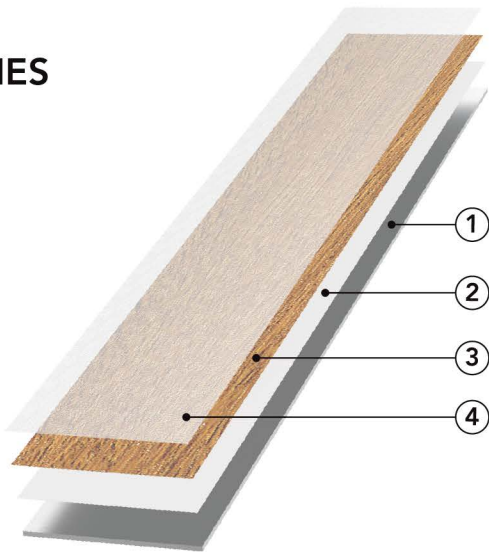


OUTSIDE CORNER

- 1. ALUMINUM**
6063-T5 Aluminum extrusion 0.055" (1.40mm) thick, recognized as the industry's first choice for its exceptional durability.
- The two-piece accessory moldings are joined together using a snap system, allowing installation without exposed screws.
- Installation can be done horizontally and vertically.
- 2. PRIMER COAT**
Specially formulated primer coat $\pm 1.2\text{mils}$ (30.48 μm) thick assures optimal adhesion between aluminum and ink.
- 3. HD PRINTING**
High-definition digital inkjet print $\pm 1\text{mil}$ (25.4 μm) thick of a wide range of textures with outstanding color variations.
- 4. Z-CLEAR**
A protective clear coat $\pm 1.2\text{mils}$ (30.48 μm) thick is applied to provide long-term protection against fading.

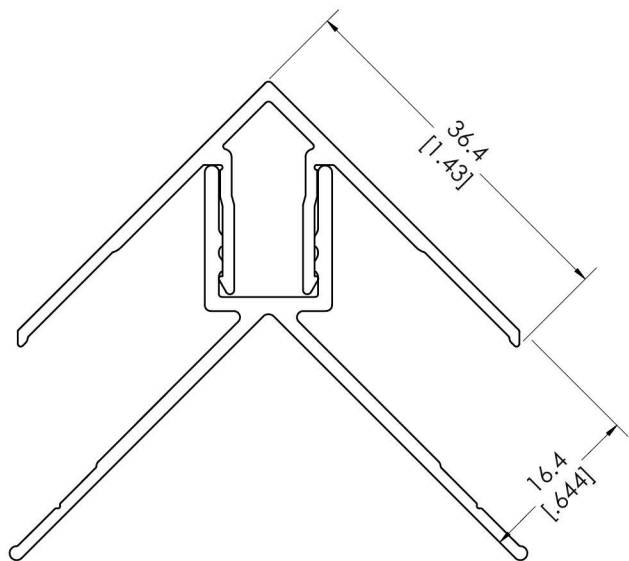



Not to scale. Dimensions : mm [in]

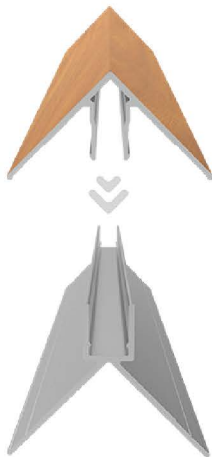

CAP

BASE

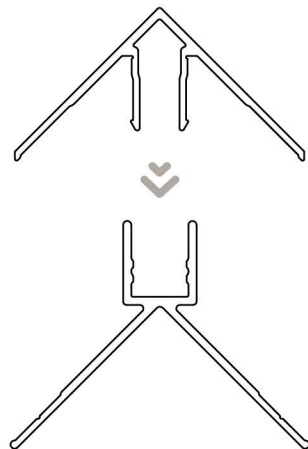

| | | | |
|-------------------------------------------------------------------------------------------------------------------------------------|---------|----------------------------------------------------|----------------------------------------------|
| Name : | | Date : | Initials : |
| Project : | Color : | Product : Outside corner siding accessories | |
|  DIGITAL PRINTING 1-888-88DIZAL DIZAL.COM | | Model : FA-OSC-1201 | Material : 6063-T5 aluminum |
| | | Length : 12ft 3.56m | Weight (Cap only) : 1.64kg 3.62lbs |
| | | Drawing by : JCC Date : 11/11/20 | Total weight (Cap & Base) : 3.28kg 7.23lbs |
| | | Rev. date : 20/12/22 | Format : 8.5" x 11" 216 x 279 mm |

TESTS and CERTIFICATIONS (visit dizal.com for full details)

- . CAN/ULC S102 - Fire Resistance
- . CAN/ULC S114 - Fire Resistance
- . ASTM E84 - Fire Resistance
- . NFPA 285 - Fire Resistance
- . ISO 7895 - Impact Resistance
- . ASTM D3359 - Adhesion Testing
- . ASTM D6578 - Graffiti Resistance
- . ASTM G155 - UV Resistance
- . ISO 7895 / ASTM E330 - Wind load
- . ASTM D4060 (CS-17) - Abrasion Resistance
- . Florida Building Code (FBC) compliance
- . LEED V4

Dizal reserves the right to modify the elements on this technical data sheet without prior notice.