


TECHNICAL DATA SHEET ALUMINUM SIDING

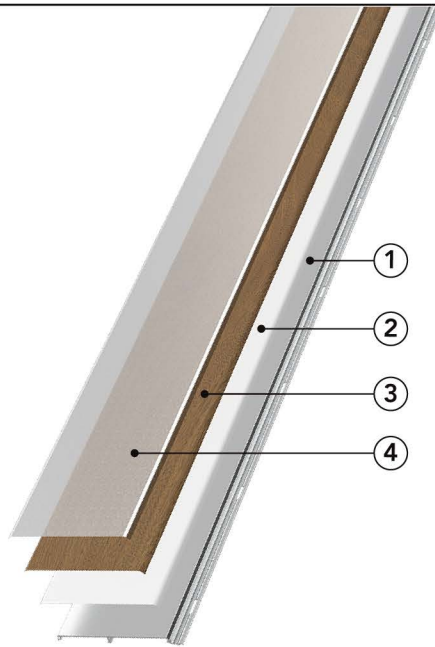

3V PLANK

1. ALUMINUM

6063-T5 Aluminum extrusion 0.055" (1.40mm) thick, recognized as the industry's first choice for its exceptional durability.

Oblong holes 1.5" x 0.187" (38.1mm x 4.75mm), all being repeated every 8" (203mm) to allow a fast and easy screw insertion.

All sizes of profiles interlock with each other with simple tongue and groove mating system. (see Detail A)

Installation can be made both vertically and horizontally.

2. PRIMER COAT



Specially formulated primer coat ± 1.2 mils (30.48 μ m) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING

High-definition digital inkjet print ± 1 mil (25.4 μ m) thick of a wide range of textures with outstanding color variations.

4. Z-CLEAR


A protective clear coat ± 1.2 mils (30.48 μ m) thick is applied to provide long-term protection against fading.

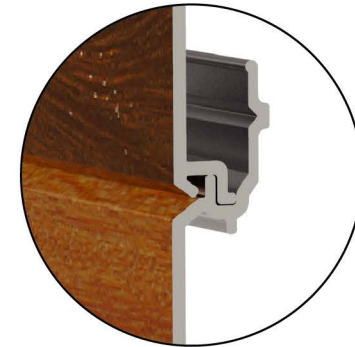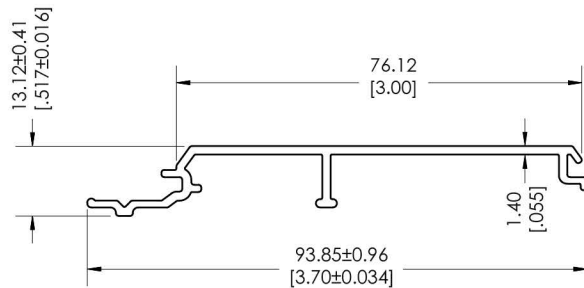

Detail A



Not to scale. Dimensions : mm [in]


Name :	Date :	Initials :
Project :	Color :	Product : 3in Plank - V-Groove profile
 DIGITAL PRINTING 1-888-88DIZAL DIZAL.COM	Model : FP-03V-1624	Material : 6063-T5 aluminum
	Length : 16ft 4.87m	Weight per plank : 2.63kg 5.8lb
	Drawing by : JCC Date : 11/11/20	Weight per box (24 pces) : 64kg 141lb
	Rev. date : 20/12/22	Format : 8.5" x 11"

TESTS and CERTIFICATIONS (visit dizal.com for full details)

• CAN/ULC S102 - Fire Resistance	• ASTM D6578 - Graffiti Resistance
• CAN/ULC S114 - Fire Resistance	• ASTM G155 - UV Resistance
• ASTM E84 - Fire Resistance	• ISO 7895 / ASTM E330 - Wind load
• NFPA 285 - Fire Resistance	• ASTM E1592 - Wind load
• ISO 7895 - Impact Resistance	• ASTM D4060 (CS-17) - Abrasion Resistance
• ASTM D3359 - Adhesion Testing	• Florida Building Code (FBC) compliance
	• LEED V4

Dizal reserves the right to modify the elements on this technical data sheet without prior notice.

TECHNICAL DATA SHEET ALUMINUM SIDING

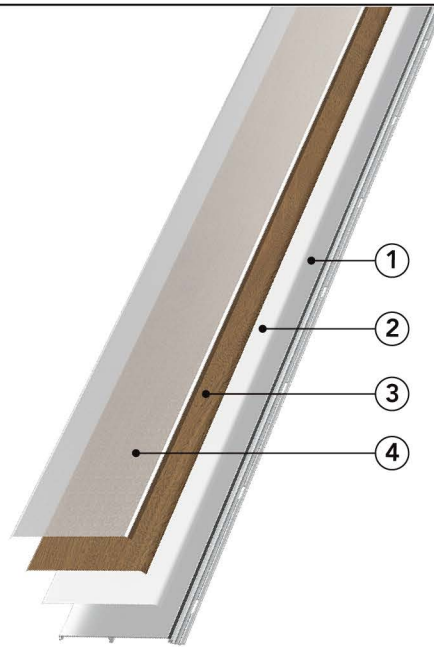

4F PLANK

1. ALUMINUM

6063-T5 Aluminum extrusion 0.062" (1.60mm) thick, recognized as the industry's first choice for its exceptional durability.

Oblong holes 1.5" x 0.187" (38.1mm x 4.75mm), all being repeated every 8" (203mm) to allow a fast and easy screw insertion.

All sizes of profiles interlock with each other with simple tongue and groove mating system. (see Detail A)

Installation can be made both vertically and horizontally.

2. PRIMER COAT



Specially formulated primer coat ± 1.2 mils (30.48 μ m) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING

High-definition digital inkjet print ± 1 mil (25.4 μ m) thick of a wide range of textures with outstanding color variations.

4. Z-CLEAR


A protective clear coat ± 1.2 mils (30.48 μ m) thick is applied to provide long-term protection against fading.

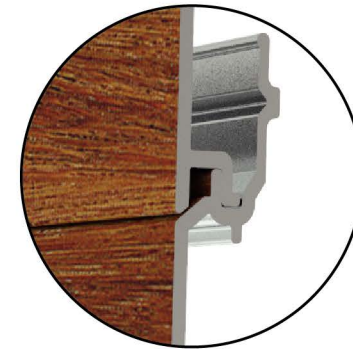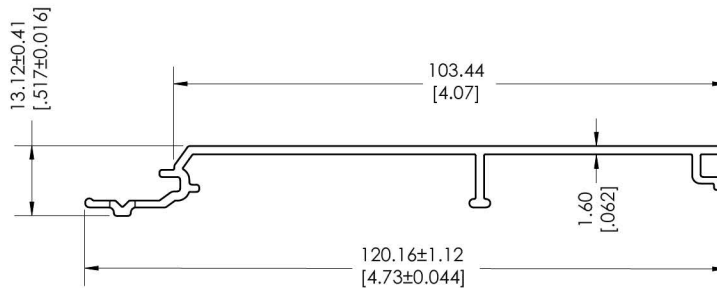

Detail A



Not to scale. Dimensions : mm [in]


Name :	Date :	Initials :
Project :	Color :	Product : 4in Plank - Flat profile
 D I Z A L [®] DIGITAL PRINTING 1-888-88DIZAL DIZAL.COM	Model : FP-04F-1618	Material : 6063-T5 aluminum
	Length : 16ft 4.87m	Weight per plank : 3.28kg 7.23lb
	Drawing by : JCC Date : 11/11/20 Rev. date : 20/12/22	Weight per box (18 pces) : 60kg 132lb
		Format : 8.5" x 11"

TESTS and CERTIFICATIONS (visit dizal.com for full details)

. CAN/ULC S102 - Fire Resistance	. ASTM D6578 - Graffiti Resistance
. CAN/ULC S114 - Fire Resistance	. ASTM G155 - UV Resistance
. ASTM E84 - Fire Resistance	. ISO 7895 / ASTM E330 - Wind load
. NFPA 285 - Fire Resistance	. ASTM E1592 - Wind load
. ISO 7895 - Impact Resistance	. ASTM D4060 (CS-17) - Abrasion Resistance
. ASTM D3359 - Adhesion Testing	. Florida Building Code (FBC) compliance
	. LEED V4

Dizal reserves the right to modify the elements on this technical data sheet without prior notice.

TECHNICAL DATA SHEET ALUMINUM SIDING

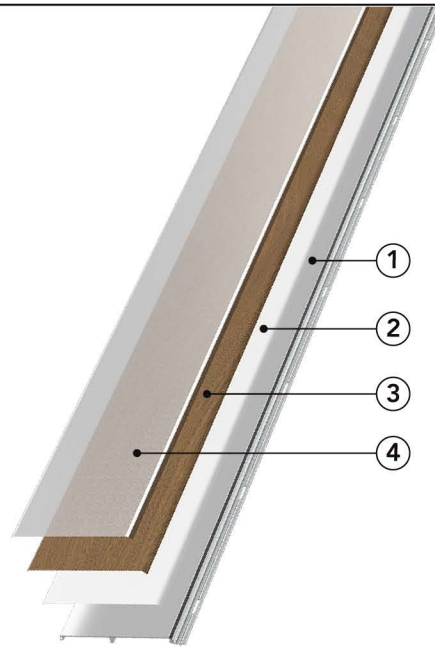

4V PLANK

1. ALUMINUM

6063-T5 Aluminum extrusion 0.062" (1.60mm) thick, recognized as the industry's first choice for its exceptional durability.

Oblong holes 1.5" x 0.187" (38.1mm x 4.75mm), all being repeated every 8" (203mm) to allow a fast and easy screw insertion.

All sizes of profiles interlock with each other with simple tongue and groove mating system. (see Detail A)

Installation can be made both vertically and horizontally.

2. PRIMER COAT



Specially formulated primer coat ± 1.2 mils (30.48 μ m) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING

High-definition digital inkjet print ± 1 mil (25.4 μ m) thick of a wide range of textures with outstanding color variations.

4. Z-CLEAR


A protective clear coat ± 1.2 mils (30.48 μ m) thick is applied to provide long-term protection against fading.

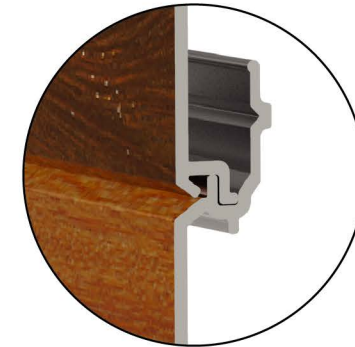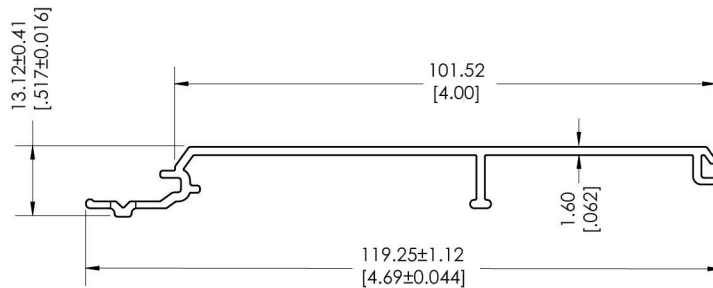

Detail A



Not to scale. Dimensions : mm [in]


Name :		Date :	Initials :
Project :	Color :	Product : 4in Plank - V-Groove profile	
 DIGITAL PRINTING 1-888-88DIZAL DIZAL.COM		Model : FP-04V-1618	Material : 6063-T5 aluminum
		Length : 16ft 4.87m	Weight per plank : 3.25kg 7.17lb
		Drawing by : JCC Date : 11/11/20	Weight per box (18 pces) : 60kg 132lb
		Rev. date : 20/12/22	Format : 8.5" x 11"

TESTS and CERTIFICATIONS (visit dizal.com for full details)

. CAN/ULC S102 - Fire Resistance	. ASTM D6578 - Graffiti Resistance
. CAN/ULC S114 - Fire Resistance	. ASTM G155 - UV Resistance
. ASTM E84 - Fire Resistance	. ISO 7895 / ASTM E330 - Wind load
. NFPA 285 - Fire Resistance	. ASTM E1592 - Wind load
. ISO 7895 - Impact Resistance	. ASTM D4060 (CS-17) - Abrasion Resistance
. ASTM D3359 - Adhesion Testing	. Florida Building Code (FBC) compliance
	. LEED V4

Dizal reserves the right to modify the elements on this technical data sheet without prior notice.

TECHNICAL DATA SHEET ALUMINUM SIDING

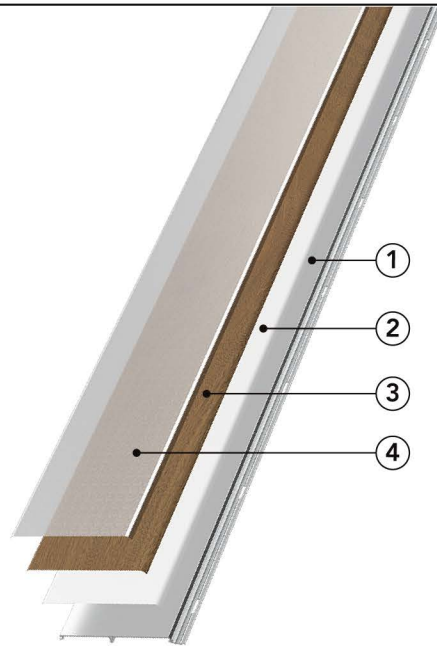

6F PLANK

1. ALUMINUM

6063-T5 Aluminum extrusion 0.062" (1.60mm) thick, recognized as the industry's first choice for its exceptional durability.

Oblong holes 1.5" x 0.187" (38.1mm x 4.75mm), all being repeated every 8" (203mm) to allow a fast and easy screw insertion.

All sizes of profiles interlock with each other with simple tongue and groove mating system. (see Detail A)

Installation can be made both vertically and horizontally.

2. PRIMER COAT

Specially formulated primer coat ± 1.2 mils (30.48 μ m) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING


High-definition digital inkjet print ± 1 mil (25.4 μ m) thick of a wide range of textures with outstanding color variations.

4. Z-CLEAR

A protective clear coat ± 1.2 mils (30.48 μ m) thick is applied to provide long-term protection against fading.




Not to scale. Dimensions : mm [in]

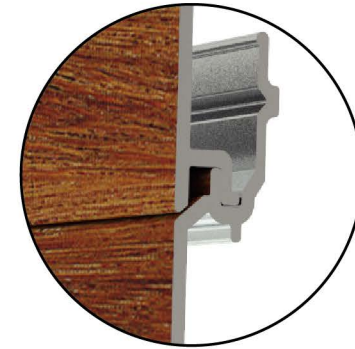

Detail A




Name :		Date :	Initials :
Project :	Color :	Product : 6in Plank - Flat profile	
 DIGITAL PRINTING 1-888-88DIZAL DIZAL.COM		Model : FP-06F-1612	Material : 6063-T5 aluminum
		Length : 16ft 4.87m	Weight per plank : 4.73kg 10.43lb
		Drawing by : JCC Date : 11/11/20	Weight per box (12 pces) : 57kg 125lb
		Rev. date : 20/12/22	Format : 8.5" x 11"

TESTS and CERTIFICATIONS (visit dizal.com for full details)

• CAN/ULC S102 - Fire Resistance	• ASTM D6578 - Graffiti Resistance
• CAN/ULC S114 - Fire Resistance	• ASTM G155 - UV Resistance
• ASTM E84 - Fire Resistance	• ISO 7895 / ASTM E330 - Wind load
• NFPA 285 - Fire Resistance	• ASTM E1592 - Wind load
• ISO 7895 - Impact Resistance	• ASTM D4060 (CS-17) - Abrasion Resistance
• ASTM D3359 - Adhesion Testing	• Florida Building Code (FBC) compliance
	• LEED V4

Dizal reserves the right to modify the elements on this technical data sheet without prior notice.

TECHNICAL DATA SHEET ALUMINUM SIDING

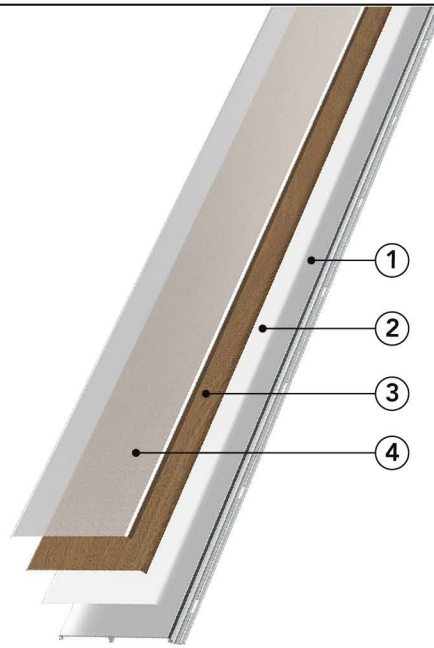

6V PLANK

1. ALUMINUM

6063-T5 Aluminum extrusion 0.062" (1.60mm) thick, recognized as the industry's first choice for its exceptional durability.

Oblong holes 1.5" x 0.187" (38.1mm x 4.75mm), all being repeated every 8" (203mm) to allow a fast and easy screw insertion.

All sizes of profiles interlock with each other with simple tongue and groove mating system. (see Detail A)

Installation can be made both vertically and horizontally.

2. PRIMER COAT



Specially formulated primer coat ± 1.2 mils (30.48 μ m) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING

High-definition digital inkjet print ± 1 mil (25.4 μ m) thick of a wide range of textures with outstanding color variations.

4. Z-CLEAR


A protective clear coat ± 1.2 mils (30.48 μ m) thick is applied to provide long-term protection against fading.

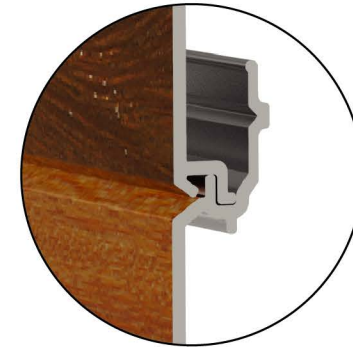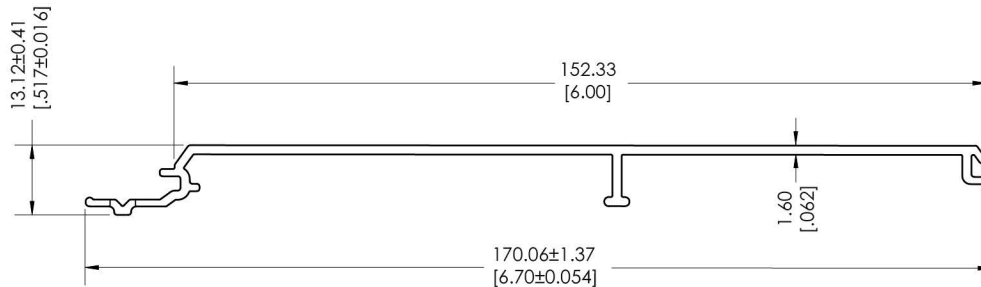

Detail A



Not to scale. Dimensions : mm [in]


Name :	Date :	Initials :
Project :	Color :	Product : 6in Plank - V-Groove profile
 D I Z A L DIGITAL PRINTING 1-888-88DIZAL DIZAL.COM	Model : FP-06C-1612	Material : 6063-T5 aluminum
	Length : 16ft 4.87m	Weight per plank : 4.69kg 10.34lb
	Drawing by : JCC Date : 11/11/20 Rev. date : 20/12/22	Weight per box (12 pces) : 57kg 125lb
		Format : 8.5" x 11"

TESTS and CERTIFICATIONS (visit dizal.com for full details)

. CAN/ULC S102 - Fire Resistance	. ASTM D6578 - Graffiti Resistance
. CAN/ULC S114 - Fire Resistance	. ASTM G155 - UV Resistance
. ASTM E84 - Fire Resistance	. ISO 7895 / ASTM E330 - Wind load
. NFPA 285 - Fire Resistance	. ASTM E1592 - Wind load
. ISO 7895 - Impact Resistance	. ASTM D4060 (CS-17) - Abrasion Resistance
. ASTM D3359 - Adhesion Testing	. Florida Building Code (FBC) compliance
	. LEED V4

Dizal reserves the right to modify the elements on this technical data sheet without prior notice.

TECHNICAL DATA SHEET
ALUMINUM SIDING

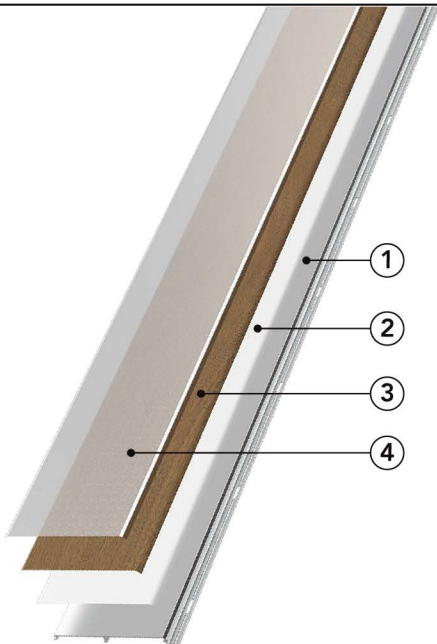

6C PLANK

1. ALUMINUM

6063-T5 Aluminum extrusion 0.062" (1.60mm) thick, recognized as the industry's first choice for its exceptional durability.

Oblong holes 1.5" x 0.187" (38.1mm x 4.75mm), all being repeated every 8" (203mm) to allow a fast and easy screw insertion.

All sizes of profiles interlock with each other with simple tongue and groove mating system. (see Detail A)

Installation can be made both vertically and horizontally.

2. PRIMER COAT


Specially formulated primer coat ±1.2mils (30.48µm) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING


High-definition digital inkjet print ±1mil (25.4µm) thick of a wide range of textures with outstanding color variations.

4. Z-CLEAR

A protective clear coat ±1.2mils (30.48µm) thick is applied to provide long-term protection against fading.

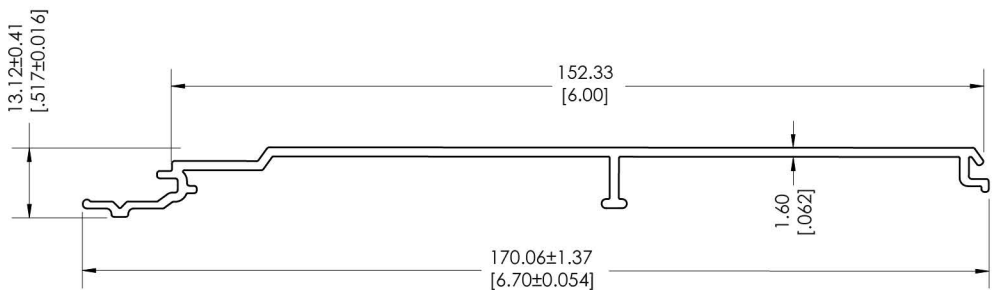


Not to scale. Dimensions : mm [in]

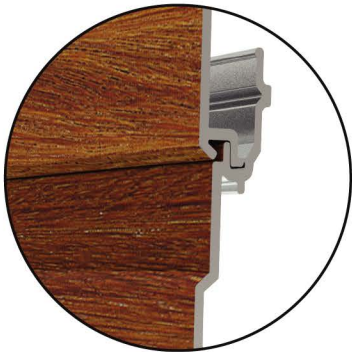

Detail A




Name :		Date :	Initials :
Project :	Color :	Product : 6in Plank - Channel profile	
 <small>Dizal reserves the right to modify the elements on this technical data sheet without prior notice.</small>		Model : FP-06C-1612	Material : 6063-T5 aluminum
		Length : 16ft 4.87m	Weight per plank : 4.73kg 10.43lb
		Drawing by : JCC Date : 11/11/20	Weight per box (12 pces) : 57kg 125lb
		Rev. date : 20/12/22	Format : 8.5" x 11"

TESTS and CERTIFICATIONS (visit dizal.com for full details)

- . CAN/ULC S102 - Fire Resistance
- . CAN/ULC S114 - Fire Resistance
- . ASTM E84 - Fire Resistance
- . NFPA 285 - Fire Resistance
- . ISO 7895 - Impact Resistance
- . ASTM D3359 - Adhesion Testing
- . ASTM D6578 - Graffiti Resistance
- . ASTM G155 - UV Resistance
- . ISO 7895 / ASTM E330 - Wind load
- . ASTM E1592 - Wind load
- . ASTM D4060 (CS-17) - Abrasion Resistance
- . Florida Building Code (FBC) compliance
- . LEED V4

TECHNICAL DATA SHEET ALUMINUM SIDING

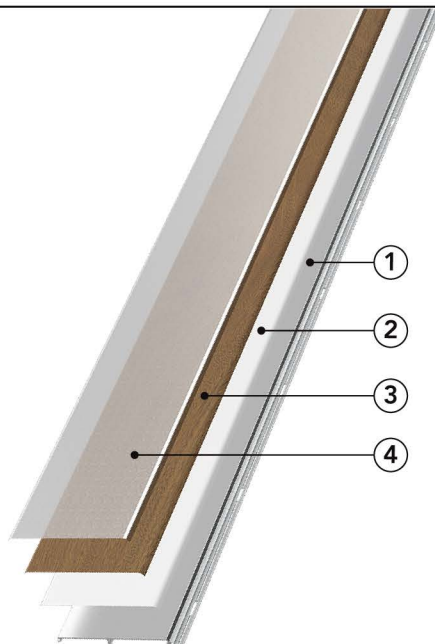

8F PLANK

1. ALUMINUM

6063-T5 Aluminum extrusion 0.09" (2.29mm) thick, recognized as the industry's first choice for its exceptional durability.

Oblong holes 1.5" x 0.187" (38.1mm x 4.75mm), all being repeated every 8" (203mm) to allow a fast and easy screw insertion.

All sizes of profiles interlock with each other with simple tongue and groove mating system. (see Detail A)

Installation can be made both vertically and horizontally.

2. PRIMER COAT



Specially formulated primer coat ± 1.2 mils (30.48 μ m) thick assures optimal adhesion between aluminum and ink.

3. HD PRINTING

High-definition digital inkjet print ± 1 mil (25.4 μ m) thick of a wide range of textures with outstanding color variations.

4. Z-CLEAR


A protective clear coat ± 1.2 mils (30.48 μ m) thick is applied to provide long-term protection against fading.

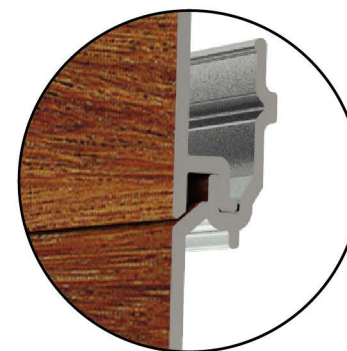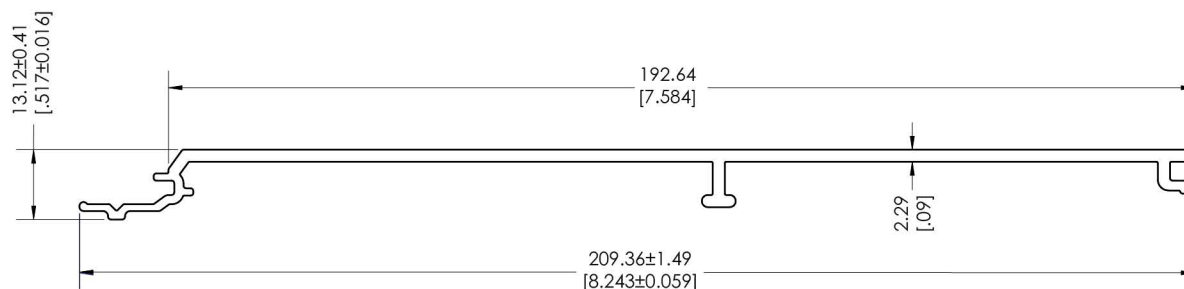

Detail A

Not to scale. Dimensions : mm [in]



Name :		Date :	Initials :
Project :	Color :	Product : 8in Plank - Flat profile	
		Model : FP-08F-1610	Material : 6063-T5 aluminum
		Length : 16ft 4.87m	Weight per plank : 7.20kg 15.9lb
		Drawing by : JCC	Weight per box (10 pces) : 72kg 158lb
		Date : 11/11/20	Format : 8.5" x 11"
Dizal reserves the right to modify the elements on this technical data sheet without prior notice.		Rev. date : 20/12/22	

TESTS and CERTIFICATIONS (visit dizal.com for full details)

. CAN/ULC S102 - Fire Resistance	. ASTM D6578 - Graffiti Resistance
. CAN/ULC S114 - Fire Resistance	. ASTM G155 - UV Resistance
. ASTM E84 - Fire Resistance	. ISO 7895 / ASTM E330 - Wind load
. NFPA 285 - Fire Resistance	. ASTM E1592 - Wind load
. ISO 7895 - Impact Resistance	. ASTM D4060 (CS-17) - Abrasion Resistance
. ASTM D3359 - Adhesion Testing	. Florida Building Code (FBC) compliance
	. LEED V4