
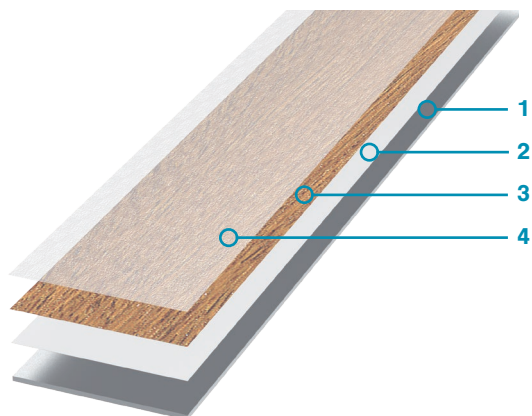
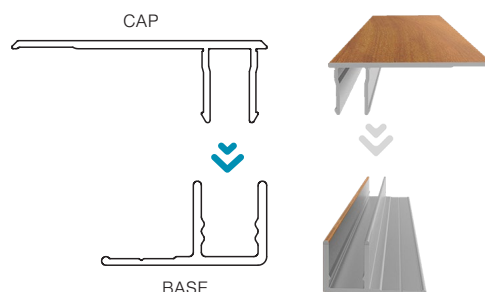


TECHNICAL DATA SHEET

Aluminum siding accessories  
MAE Series

# J-Trim (1.75 in)

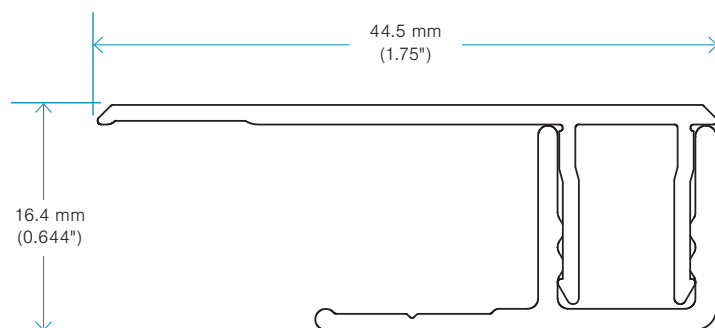

## 1. ALUMINUM

6063-T5 Aluminum extrusion 0.055" (1.40 mm) thick, recognized as the industry's first choice for its exceptional durability.

The two-piece accessory moldings are joined together using a snap system, allowing installation without exposed screws.

Installation can be done horizontally and vertically.

## 2. PRIMER COAT

Specially formulated primer coat  $\pm 1.2$  mils (30.48  $\mu\text{m}$ ) thick assures optimal adhesion between aluminum and ink.

## 3. HD PRINTING

High-definition digital inkjet print  $\pm 1$  mil (25.4  $\mu\text{m}$ ) thick of a wide range of textures with outstanding color variations.

## 4. CLEAR COAT

A protective clear coat  $\pm 1.2$  mils (30.48  $\mu\text{m}$ ) thick is applied to provide long-term protection against fading.

## General Specifications

### MODEL

FA-JTL-1201

### LENGTH

12 ft | 3.56 m

### PRODUCT

J-trim (1.75 in), siding accessories

### MATERIAL

6063-T5 aluminum

### WEIGHT

- Cap only: 2.23 kg | 4.92 lbs
- Total (Cap & Base): 3.14 kg | 6.92 lbs

### TESTS AND CERTIFICATIONS\*

- CAN/ULC S102 - Fire Resistance
- CAN/ULC S114 - Fire Resistance
- ASTM E84 - Fire Resistance
- NFPA 285 - Fire Resistance
- ISO 7895 - Impact Resistance
- ASTM D3359 - Adhesion testing
- ASTM D6578 - Graffiti Resistance
- ASTM G155 - UV Resistance
- ISO 7895 / ASTM E330 - Wind Load
- ASTM D4060 (CS-17) - Abrasion Resistance
- Florida Building Code (FBC) compliance
- LEED V4