
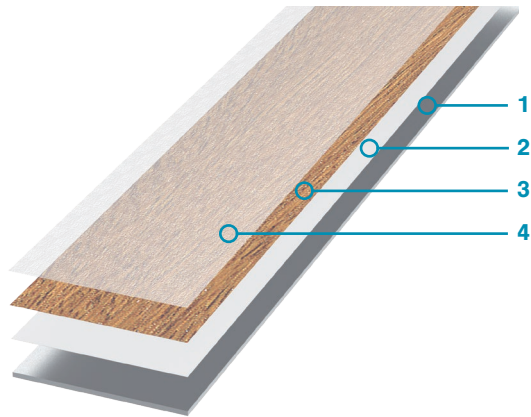


TECHNICAL DATA SHEET

Aluminum siding accessories
MAE Series

Starter strip

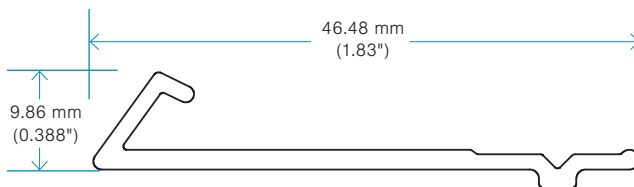

1. ALUMINUM

6063-T5 Aluminum extrusion
0.055" (1.40 mm) thick, recognized
as the industry's first choice for its
exceptional durability.

The two-piece accessory moldings
are joined together using a snap
system, allowing installation without
exposed screws.

Installation can be done horizontally
and vertically.

2. PRIMER COAT

Specially formulated primer coat ± 1.2 mils
(30.48 μm) thick assures optimal adhesion
between aluminum and ink.

3. HD PRINTING

High-definition digital inkjet print
 ± 1 mil (25.4 μm) thick of a wide
range of textures with outstanding
color variations.

4. CLEAR COAT

A protective clear coat ± 1.2 mils
(30.48 μm) thick is applied to
provide long-term protection
against fading.

General Specifications

MODEL

FA-SSV-1201

LENGTH

12 ft | 3.56 m

PRODUCT

Starter strip siding accessories

MATERIAL

6063-T5 aluminum

WEIGHT

1.16 kg | 2.56 lb

TESTS AND CERTIFICATIONS*

- CAN/ULC S102 - Fire Resistance
- CAN/ULC S114 - Fire Resistance
- ASTM E84 - Fire Resistance
- NFPA 285 - Fire Resistance
- ISO 7895 - Impact Resistance
- ASTM D3359 - Adhesion testing
- ASTM D6578 - Graffiti Resistance
- ASTM G155 - UV Resistance
- ISO 7895 / ASTM E330 - Wind Load
- ASTM D4060 (CS-17) - Abrasion Resistance
- Florida Building Code (FBC) compliance
- LEED V4